



WMA-6 Wall-Mounted Rotary Phase Converter

Professional. Rugged. Affordable

The wall-mount version of the MA Series offers more features than ever. It includes a powder coated Phasemaster® control panel with integrated Start/Stop push buttons and a 3 phase induction generator.

QUICK SPECS


- **Single Phase Input Voltage:** 208 - 245 Volts
- **Best Performance Single Motor Start:** 30 HP
- **3 Phase Rated Output:** 208 - 245 Volts
- **Recommended 3 Phase Sizing:** 72 Amps
- **Minimum Single Phase Circuit:** 150 Amps
- **Voltage Balance:** $\pm 2-5\%$ (Based on input)

Control Panel Features

- 50+ Years of Technical Support Knowledge
- Digitally Controlled & Protected Start Circuit
- Complete Phase Power Failure Protection
- CNC Voltage Balancing
- Power "ON" Indicator Light
- Easy Power Distribution Block Connections
- 5 Year Parts/ Lifetime Service Warranty

Induction Generator Features

- Proprietary Custom Design
- Low Impedance/High-Efficiency Design
- Custom Copper Windings and Rotor
- Available in ODP and TEFC
- Soft Start Induction Generator
- Shielded Windings

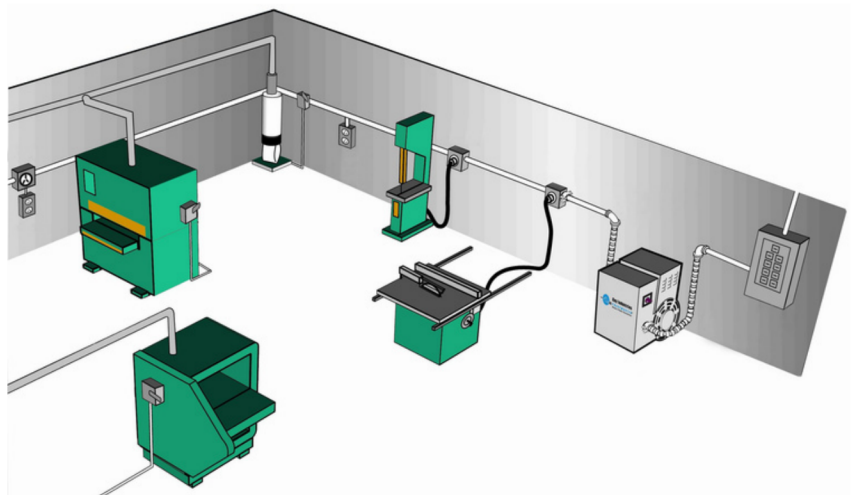

7834 Queen Road
Plymouth, Indiana 46563
(574) 236-6022
www.kayind.com

SPECIFICATIONS

Model

Phasemaster	Brand
MA-Series	Line
WMA-3	Model #

General Specifications

30	Horse Power (HP)
364T	Generator Frame
44.7	Kilo-watt (kW)
60	Frequency (Hz)
ODP	Generator Type
NEMA 1 (Indoor)	Enclosure Type

Single Phase Electrical Specifications

208-245	Voltage Input
10.9	Idle Amperage
150	Minimum Fuse Size
150	Minimum Circuit Breaker Size
300	Maximum Fuse Size
300	Maximum Circuit Breaker Size

Three Phase Electrical Specifications

208-245 based on input voltage	Voltage Output
2- 5%	Voltage Balance
149	Output Amperage
3/0 AWG	Minimum Wire to Generator
3/0 AWG or based on load	Minimum Wire to Load


Dimensions & Weights

27" X 18" X 8"	Enclosure (H X W X D)
23" X 13.5"	Induction Generator (Length X Diameter)
519 lbs	Approx. Total Shipping Weight of Standard

AVAILABLE ACCESSORIES



Wired & Wireless Remote Switches

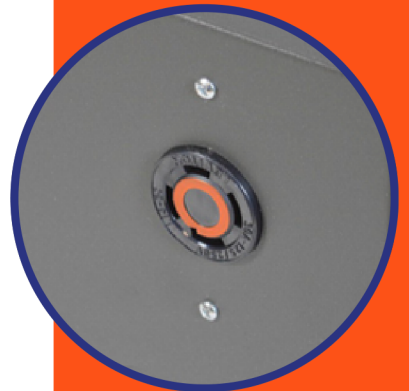

Twist-Lock Outlets & Plugs

Converter Options:

- Save time, and ensure proper assembly of your rotary phase converter with our total all-in-one model TMA converter featuring 2 wires in, 3 wires out. (TMA is seen on right).
- For an additional cost, we offer 480v in, 480v out versions, Available in TMA Models Only.
- Need a NEMA 3R control panel? You got it. For an entire outdoor unit, see the TPI model.
- We offer UL and Canadian Certified converters at an additional cost.
- Load Sensing Voltage (LSV) regulation available. Enables the converter to maintain balanced output voltages over a wide load range.



7834 Queen Road
 Plymouth, Indiana 46563
 (574) 236-6022
www.kayind.com