

# **QUICK SPECS**

- Single Phase Input Voltage: 208 245 Volts
- Best Performance Single
   Motor Start: 20 HP
- 3 Phase Rated Output: 208 - 245 Volts
- Recommended 3 Phase
   Sizing: 50 Amps
- Minimum Single Phase Circuit: 100 Amps
- Voltage Balance: +/-2-5%
   (Based on input)



(574) 236-6022

rohenas.com





# TMA-4 Total All-in-One Rotary Phase Converter

# **Professional. Rugged. Affordable**


The total all-in-one version of the MA Series offers more features than ever. It includes a powder coated Phasemaster® control panel with digital Start/Stop push buttons, a 3 PH induction generator, and rubber feet.

#### **Control Panel Features**

- 50+ Years of Technical Support Knowledge
- Digitally Controlled & Protected Start Circuit
- Complete Phase Power Failure Protection
- CNC Voltage Balancing
- Power "ON" Indicator Light
- Easy Power Distribution
   Block Connections
- 5 Year Parts/ Lifetime Service Warranty

#### **Induction Generator Features**

- Proprietary Custom Design
- Low Impedance/High-Efficiency Design
- Custom Copper Windings and Rotor
- Available in ODP and TEFC
- Soft Start Induction
   Generator
- Shielded Windings

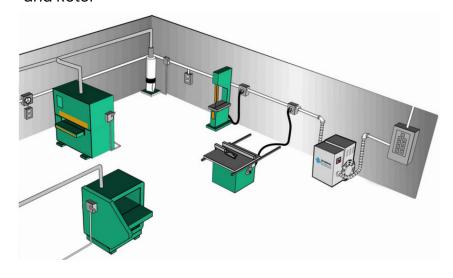

#### **SPECIFICATIONS**

Model

Phasemaster Brand
TMA-4 Model #

**General Specifications** 

20 Horse Power (HP)
324T Generator Frame
29.8 Kilo-watt (kW)
60 Frequency (Hz)
0DP Generator Type
NEMA1 (Indoor) Enclosure Type

Single Phase Electrical Specifications

208-245
14.62
100
Voltage Input
Idle Amperage
Minimum Fuse Size

100 Minimum Circuit Breaker Size

200 Maximum Fuse Size

200 Maximum Circuit BreakerSize

Three Phase Electrical Specifications

208-245 based on input voltage Voltage Output

2-5% Voltage Balance
98 Output Amperage

1 AWG Minimum Wire to Generator

1 AWG or based on load Minimum Wire to Load

Dimensions & Weights

22.5" X 22.5" Induction Generator (L X W)

430 lbs. Approx. Total Shipping Weight of Standard

# AVAILABLE ACCESSORIES



Wired & Wireless Remote Switches



Twist-Lock
Outlets & Plugs

### **Converter Options:**

- Save time, and ensure proper assembly of your rotary phase converter with our total all-in-one model TMA converter featuring 2 wires in, 3 wires out. (TMA is seen on right).
- $\bullet~$  For an additional cost, we offer 480v in, 480v out versions, Available in TMA Models Only.
- Need a NEMA 3R control panel? You got it. For an entire outdoor unit, see the TPI model.
- We offer UL and Canadian Certified converters at an additional cost.
- Load Sensing Voltage (LSV) regulation available. Enables the converter to maintain balanced output voltages over a wide load range.



(574) 236-6022

rohenas.com

