



WMA-4 Wall-Mounted Rotary Phase Converter

Professional. Rugged. Affordable

The wall-mount version of the MA Series offers more features than ever. It includes a powder coated Phasemaster® control panel with integrated Start/Stop push buttons and a 3 phase induction generator.

QUICK SPECS


- **Single Phase Input Voltage:** 208 - 245 Volts
- **Best Performance Single Motor Start:** 20 HP
- **3 Phase Rated Output:** 208 - 245 Volts
- **Recommended 3 Phase Sizing:** 50 Amps
- **Minimum Single Phase Circuit:** 100 Amps
- **Voltage Balance:** +/-2-5% (Based on input)

Control Panel Features

- 50+ Years of Technical Support Knowledge
- Digitally Controlled & Protected Start Circuit
- Complete Phase Power Failure Protection
- CNC Voltage Balancing
- Power "ON" Indicator Light
- Easy Power Distribution Block Connections
- 5 Year Parts/ Lifetime Service Warranty

Induction Generator Features

- Proprietary Custom Design
- Low Impedance/High-Efficiency Design
- Custom Copper Windings and Rotor
- Available in ODP and TEFC
- Soft Start Induction Generator
- Shielded Windings

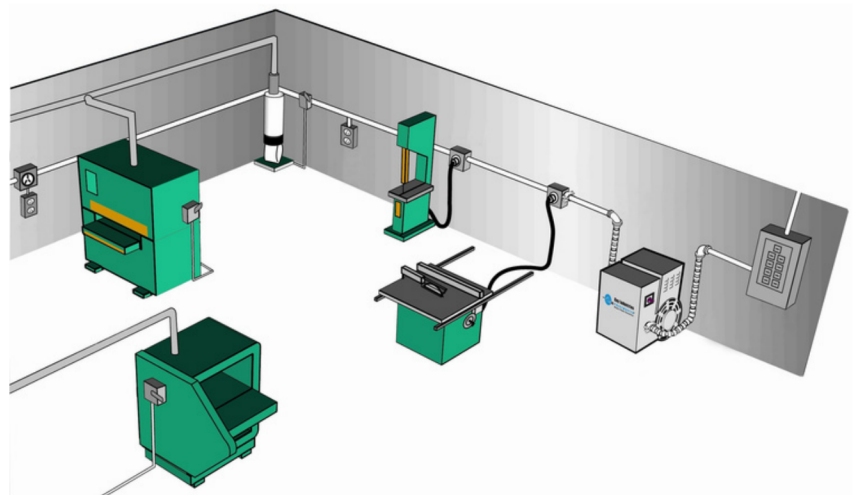

7834 Queen Road
 Plymouth, Indiana 46563
 (574) 236-6022
www.kayind.com

SPECIFICATIONS

Model

Phasemaster	Brand
MA-Series	Line
WMA-3	Model #

General Specifications

20	Horse Power (HP)
326T	Generator Frame
29.8	Kilo-watt (kW)
60	Frequency (Hz)
ODP	Generator Type
NEMA 1 (Indoor)	Enclosure Type

Single Phase Electrical Specifications

208-245	Voltage Input
14.62	Idle Amperage
100	Minimum Fuse Size
100	Minimum Circuit Breaker Size
200	Maximum Fuse Size
200	Maximum Circuit Breaker Size

Three Phase Electrical Specifications

208-245 based on input voltage	Voltage Output
2- 5%	Voltage Balance
98	Output Amperage
1 AWG	Minimum Wire to Generator
1 AWG or based on load	Minimum Wire to Load


Dimensions & Weights

27" X 18" X 8"	Enclosure (H X W X D)
22.5" X 13.5"	Induction Generator (Length X Diameter)
430 lbs	Approx. Total Shipping Weight of Standard

AVAILABLE ACCESSORIES



Wired & Wireless Remote Switches

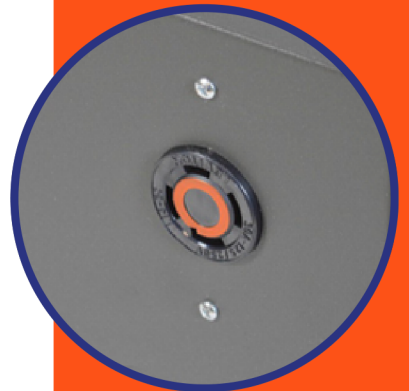

Twist-Lock Outlets & Plugs

Converter Options:

- Save time, and ensure proper assembly of your rotary phase converter with our total all-in-one model TMA converter featuring 2 wires in, 3 wires out. (TMA is seen on right).
- For an additional cost, we offer 480v in, 480v out versions, Available in TMA Models Only.
- Need a NEMA 3R control panel? You got it. For an entire outdoor unit, see the TPI model.
- We offer UL and Canadian Certified converters at an additional cost.
- Load Sensing Voltage (LSV) regulation available. Enables the converter to maintain balanced output voltages over a wide load range.



7834 Queen Road
 Plymouth, Indiana 46563
 (574) 236-6022
www.kayind.com